FOR





Questions, problems, missing parts? Before returning to the store,

call Defiant Customer Service TOLL FREE HELP LINE 1-877-ONE-LOCK

HOMEDEPOT.COM

08:30 a.m.-05:30 p.m., EST, Monday - Friday

LIMITED LIFETIME MECHANICAL AND 1 YEAR ELECTRONIC WARRANTY

LIMITED LIFETIME MECHANICAL AND 1 YEAR ELECTRONIC WARRANTY

The retailer of this product, hereby warrants, subject to the conditions set forth below, that it will either repair or replace, at its option, this product if it proves to be defective by reason of improper workmanship or materials within the original purchaser's limited time. In order to obtain repairs or replacement under this limited warranty is limited to time original purchaser in which you bought it.

Original purchaser: This limited warranty is limited to the original purchaser at retail of this product from refailer.

Original purchaser: This limited warranty is limited to the original purchaser at retail of this product from refailer warranties of merchantability and fitness for a particular purpose, shall apply to this product. Under no circumstances shall refailer be faible for consequential or inclined in damages in connection with this product. To the extent retailer is prohibited by applicable law from excluding implied warranties, the duration of such implied warranties which are not excludable, shall be the original purchaser; lifetime. Some states do not allow the initiation on on women or implied warranties which are not excludable, if any, may not apply to you. Some states do not allow the exclusion or limitation or inclotental or consequential damages may not apply to you.

Or inclotental or consequential damages may not apply to you.

Or inclotental or consequential damages may not apply to you.

Some states do not allow the exclusion or limitation or consequential damages may not apply to you.

For the refail of the property of the prope

1 SAFETY INFORMATION

Read the precautions and instructions in this manual before installing and using this lock. Save this manual for future reference



CAUTION:
Please use four alkaline batteries for the best performance

- A. Do not attempt to disassemble any internal components of the lockset. Doing so will void the limited warranty.

 8. Do not dring or fit the lockset. Too much shock may result in permanent damage.

 Co Do not use pins or sharp objects to press the keppad.

 D. Alloways create a backup of information you wish to kepp (Master Code, User Codes,etc.) Please use the last page of this booklet as a reference.

 E. Premptip change he Master Code before operating this lockset.

CARE and MAINTENANCE:
The following instructions should be followed to properly protect and maintain your lockset:


- A. Remove locks, or do not install locks, prior to painting your door.

 8. Perdodically clean with mid soop and a soft cloth only.

 C. Do not use any abansives or chemical products containing alcohol, benzene, acids, and avoid using sharp or abrasive objects to clean this lockset.

 D. Do not allow any water or liquids into the lockset during installation.

PRE-INSTALLATION - TOOLS REQUIRED / HARDWARE INCLUDED



WARNING:

If the door needs to be drilled, please be familiar with how to use a drill safely and understand all of the door preparation steps before proceed


PACKAGE CONTENTS LIST

Part	Description	Quantity	
Α	Exterior Assembly	1	
В	Power Cable	1	
С	Torque blade	1	
D	Mounting Plate	1	
E	Interior Assembly	1]/ 🍪 📗
F	Battery Cover	1	AAV IZ I I W
G	Latch	1	
Н	Strike Plate	1	
T	Dust Box	1	
J	Key	2	
K	Drive-in Collar (Optional)	1	
L	Exterior Gasket	1	

HARDWARE CONTENTS (Actual Size)

Part	Description	Quantity								
AA	1-13/16" (46 mm) Mounting Bolt	2								
BB	3/4" (19 mm) Screw	2	2 AA (MANAGAMAN BB	Manufactured BB Account / / / /	Immunitation BB Immunitation	Management BB Management It It be	amenance BB (MICCALITIES)	Management BB Management Control of the Control of		
CC	3/4" (19 mm) Wood Screw	4				•	•			

BEFORE PROCEEDING Check Dimensions




3 DOOR DRILLING FOR NEW INSTALLATION

1 CUT OUT TEMPLATE AND USE TO MARK THE DOOR, DRILL HOLES, AND CHISEL OUT THE MORTISE.


NOTE:
If your door already has holes, skip to step 4







2 PREPARE THE DOOR JAMB – USE THE STRIKE PLATE AS A TEMPLATE TO DRILL THE LATCH AND SCREW HOLES AND CHISEL OUT THE MORTISE. THE STRIKE PLATE MUST FIT FLUSH WITH THE SURFACE OF THE DOOR JAMB.

- 1-3/16"(30 mm) 1-9/64"(29 mm)
- c. 7/8"(22 mm)
- d. 5/32"(4 mm) 2-1/4"(57 mm e. 2-1/4"(57 n f. 1"(25 mm)





4 INSTALLATION 1 INSTALLING THE LATCH A. Attach the correct fa Your latch is set for 2-3/8" b 180° C. Install the latch D. Install strike plate in door jamb cc MMMIIIIth cc MMMIIIIt 2 INSTALLING THE LOCK ASSEMBLIES

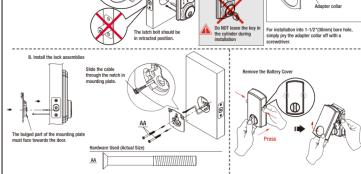








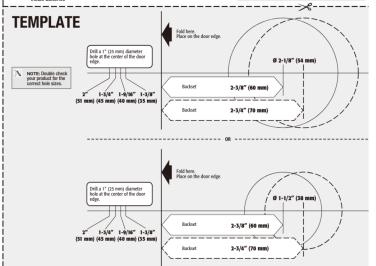

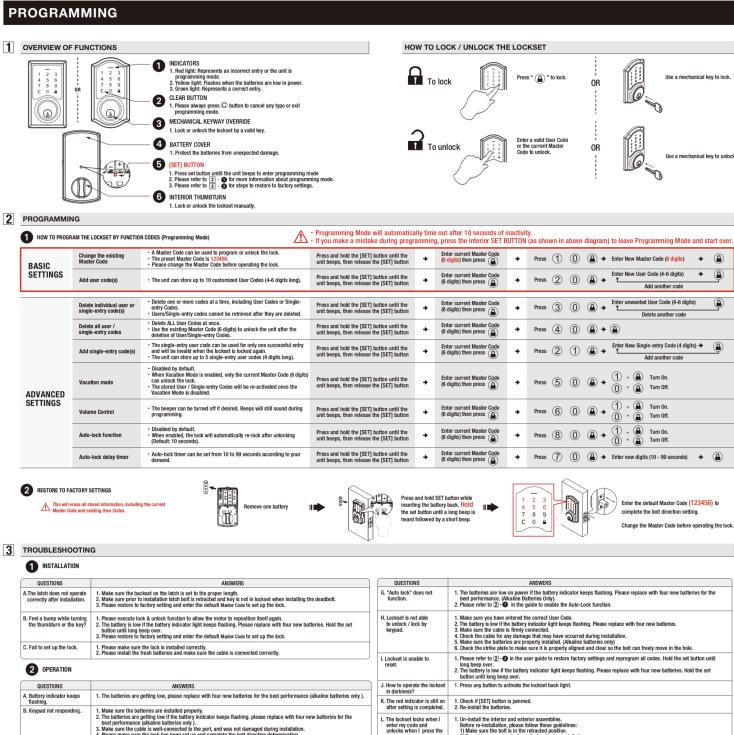

QUESTIONS	ANSWERS
A. Battery indicator keeps flashing.	1. The batteries are getting low, please replace with four new batteries for the best performance (alkaline batteries only).
B. Keypad not responding.	Make sure the batteries are installed property. The batteries are getting low if the battery indicator keeps flashing, please replace with four new batteries for the best performance (alkaline batteries only). Make sure the cable is well-connected to the port, and was not damaged during installation. Hease make sure the lock has been set up and complete the bott direction determination.
C. Master Code can not be changed.	1. Please refer to [2]- in the user guide to restore factory setting and reprogram all codes.
D. What should I do if wrong code was entered?	1. Press © button once and continue to input code according to regular procedures.
E. Can not delete all User Codes.	Make sure the whole code entering process is completed within 10 seconds, otherwise the unit will time out. Make sure the Master Code has been entered correctly.
F. Can not add a new User Code.	Make sure the whole code entering process is completed within 10 seconds, otherwise the unit will time out. Make sure the Master Code has been entered correctly. The new User Code will not be accepted when the capacity is full. Try to delete any or some existing User Codes and then add new one(s) again. A User Code must be at least 4 to 6 digits.

QUESTIONS	ANSWERS
G. "Auto lock" does not function.	 The batteries are low on power if the battery indicator keeps flashing. Please replace with four new batteries for the best performance. (Alkaline Batteries Only). Please refer to (2) ● in the guide to enable the Auto-Lock function.
H. Lockset is not able to unlock / lock by keypad.	1. Males sure you have entered the correct User Code. 2. The battley is low if the batter; vinicidazed light keeps flashing, Please replace with four new batteries. 3. Make sure the cable is firmly connected. 4. Check the cable for any dramage that may have occurred during installation. 5. Make sure the batteries are properly installed. (Alkaline batteries only) 6. Deck the strike plate to make sure it is properly aligned and clear so the bott can freely move in the hole.
I. Lockset is unable to reset.	1. Please refer to [2]. • In the user guide to restore factory settings and reprogram all codes. Hold the set button until incp beep over. • In the battery is flow if the battery indicator light keeps flashing. Please replace with four new batteries. Hold the set button until long beep over.
J. How to operate the lockset in darkness?	1. Press any button to activate the lockset back light.
K. The red indicator is still on after setting is completed.	Check if [SET] button is jammed. Re-install the batteries.
L The lockset locks when I enter my code and unlocks when I press the	1. Un-instal the linterior and exterior assemblies. Before no-installation, please highly these guidelines: 1. Make sure the bolt is in the retracted position. 2. Do not have any key in the cylorider durring installation. 3.) Make sure the forque blade is inserted horizontally. 4. Reset the unit to faciny settings and reprogram the Master Code and user codes.
M. I cannot remove my key unless it is in the locked position.	Un-install the interior and exterior assemblies. Before re-installation, please follow these guidelines: 1) Makes were the bolt is in the retracted position. 2) Do not have any key in lock cylinder. 3) Makes were the torque blade is inserbed horizontally.
If the lock appears to be dama	ged or does not operate properly, please contact customer service for further assistance.

4	ACCESS	CODE	LIST
---	--------	------	------

FEDERAL COMMUNICATIONS COMMISSION STATEMENT
This device compiles with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undestined operation. Charges or modifications not seek and sound to comply with the limits for a class 8 digital device, pursuant to part 15 of the FCC Rules. When the following the seek of the seek of the party responsible for compliance and can are a cause and protection against hermal interference in a residential installation. This equipment, which can be a cause and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no quaramente that interference will not occur; in a particular installation. If the equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to tryto correct the interference by one or more of the following measures: - Reorient or relocate the receiving antenna. - Increase the separation between the equipment and receiver. - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. - Consult the dealer or an experienced radio/TV technician for help. IC REGULATIONS
This Class B digital apparatus compiles with Canadian ICES-003. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation of the device.

After changing your Master Code, do not pass your Master Code to anyone else.						
MASTER CODE (6 digits)	WRITE YOUR MASTER CODE HERE FOR EASY ACCESS					
Name	User Code (4-6 digits)					